


EMAIL sales@Image-1.com for QUOTE!

Bookeye® 4

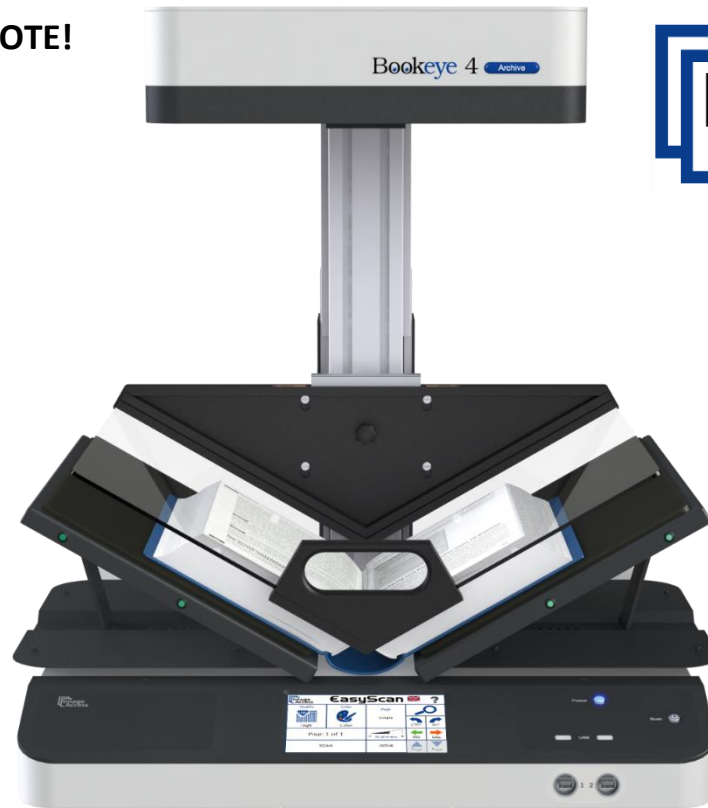

- COLOR OVERHEAD BOOK SCANNER FOR UP TO DIN/ISO A2+14%
- TRUE SCAN TECHNOLOGY, NOT A DIGICAM SUBSTITUTE
- 600 x 600 DPI SCANNER RESOLUTION
- < 2 SEC. FOR A2 SCAN
- V-SHAPED BOOK CRADLE 120-180 DEGREES
- V-SHAPED GLASS PLATE FOR PERFECT SCANS
- SCAN CLIENT INTERFACE
- AUTOMATIC FINGER AND THUMB REMOVAL
- DIGITAL COLOR BALANCE
- INTEGRATED ICC PROFILE
- USER INTERFACE CONFIGURABLE IN YOUR LANGUAGE
- INTEGRATED 64BIT LINUX, INTEL I3 QUAD CORE, 8 GB RAM, 320GB HDD
- GIGABIT TCP/IP NETWORK INTERFACE
- SUPPORTS SRGB, ADOBE RGB, NATIVE COLOR SPACES
- VIRUS RESISTANT LINUX OPERATING SYSTEM
- EXCELLENT ENERGY EFFICIENCY
- EASY INSTALLATION VIA SCAN2NET® TECHNOLOGY

Bookeye® 4 V2 Professional Archive is the scanner for digitization projects with formats up to 24.4" X 18"

Productivity meets quality in digitization!

Bookeye® 4 V2 Applications :

- Archiving documents from government agencies, registries, universities and nonprofit organizations
- Scanning newspapers, periodicals, catalogs and magazines
- Digitizing paper sheets directly from file folders
- Digitizing bound and stapled documents
- Preserving books and sensitive historical documents

***NEW! Large Format Book Scanner
Complete ScanStation Solution
Scan to Network, USB, Tablet, Phone or Device
No PC Required! (Apple iOS and Android Compatible)***

The production system for digitization projects Productivity, quality and ergonomics

Bookeye® 4 V2 Professional *Archive* is suitable for digitization projects that require high quality and maximum productivity even in 24/7 operation. Originals up to A2+ in size such as books, magazines, posters, folders or bound documents of all types, can be digitized at high speed and a resolution up to 600 dpi using the Bookeye® 4 V2 Professional *Archive*.



The unique V-shaped book cradle solution with glass plate allows scanning either at a 120 degree angle or flat.

TECHNICAL DATA

EMAIL sales@Image-1.com for QUOTE!

Maximum Scan Area	460 x 620 mm (18 x 24.4 inch), 14% more than DIN/ISO A2
Scanner Resolution	600 x 600 dpi
Scan Speed	DIN A2+ @ 150 dpi: 1.1 s DIN A2+ @ 200 dpi: 1.4 s DIN A2+ @ 300 dpi: 2.0 s DIN A2+ @ 400 dpi: 2.7 s DIN A2+ @ 600 dpi: 3.9 s
Color Depth	48 bit color / 16 bit grayscale
Scan Output	24 bit color, 8 bit grayscale, bitonal, enhanced halftone
File Formats	PDF, PDF/a, JPEG, PNM, TIFF uncompressed, TIFF G4 (CCITT), Multipage PDF, TIFF
ICC Profiles	Embedded for sRGB, Adobe RGB and native. Individual profiling via web based Scan2ICC subscription
Camera	CCD camera
Light Source	White LEDs, according IEC 60825-1: class 1, no IR/UV emission
Lamp Life Time	50.000 h (typ.)
Computer	64 bit Linux, Intel i3, quad core processor, 8 Gigabyte RAM, 320GB HDD for extra large jobs
Interface	1 GBit Fast Ethernet with TCP/IP based Scan2Net® Interface
Dimension	780 x 670 x 740 mm (30.7 x 26.4 x 29.1 inch) (H x W x D)
Weight	52,5 kg / 116 lbs.
Electrical Specification	100-240 V AC, 47 - 63 Hz (external power supply, complies with ECO standard CEC level V)
Power Consumption	≤ 0.5 W (Sleep) / 2.5 W (Standby) / 130 W (Scanning)
Operating Temperature	5 to 40 °C, 40 to 105 °F
Relative Humidity	20 to 80 % (non-condensing)
Noise	≤ 42 dB(A) (Scanning) / ≤ 33 dB(A) (Standby)
Approvals	ANSI/UL 60950-1, CAN/CSA C22.2 No. 60950-1; IEC 60950-1; GB4943.1-2011, FCC 47 Part 15



WEEE RoHS



6202 Benjamin Rd. Suite 103
Tampa, FL 33634

(800) 956-9000

sales@Image-1.com